

# Series XP UFO HIGH BAY

## Introduction

- ◆ The Series XP is built to last with 6kV surge protection standard, 113°F ambient temperature rating and IP65 rated for wet locations.
- ◆ It delivers 150 lumens per watt, with lumen levels ranging from 12,000-22,500.
- ◆ The Series XP offers two models, one with selectable wattage and one with fixed wattage, along with varied installation mount options, motion sensor and remote controller available.
- ◆ They are widely used for warehouse, storage, industrial, and sports facilities, gyms, retail environments, and more.

## Features

### Construction

- ◆ Series XP high bays feature a die-cast aluminum housing, powder coated finish, optional clear polycarbonate or diffused aluminum reflectors available separately.

### Electrical:

- ◆ High-efficiency LEDs. 0-10V dimming standard for a dimming range of 100% to 10%.
- ◆ Input voltage is 120-277V for US market. Suitable for 50/60Hz.
- ◆ Luminaire Surge Protection Level: Designed to withstand up to 6kV.

### Optics:

- ◆ High quality polycarbonate lens protects LEDs. Placement, spacing, and aperture of LEDs provides a 60/90/120 degree spread of light.

### Finish:

- ◆ Black color is standard. Customized color is available as well



80/100/120/150W  
Wattage Tunable



### Ambient Temperature:

- ◆ -22° F (-30° C) to 113° F (45° C)


### Listing :

- ◆ UL Certified to meet U.S. and Canadian standards. Suitable for wet locations. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product.

### Warranty :

- ◆ 5-years limited warranty.


## Brief introduction

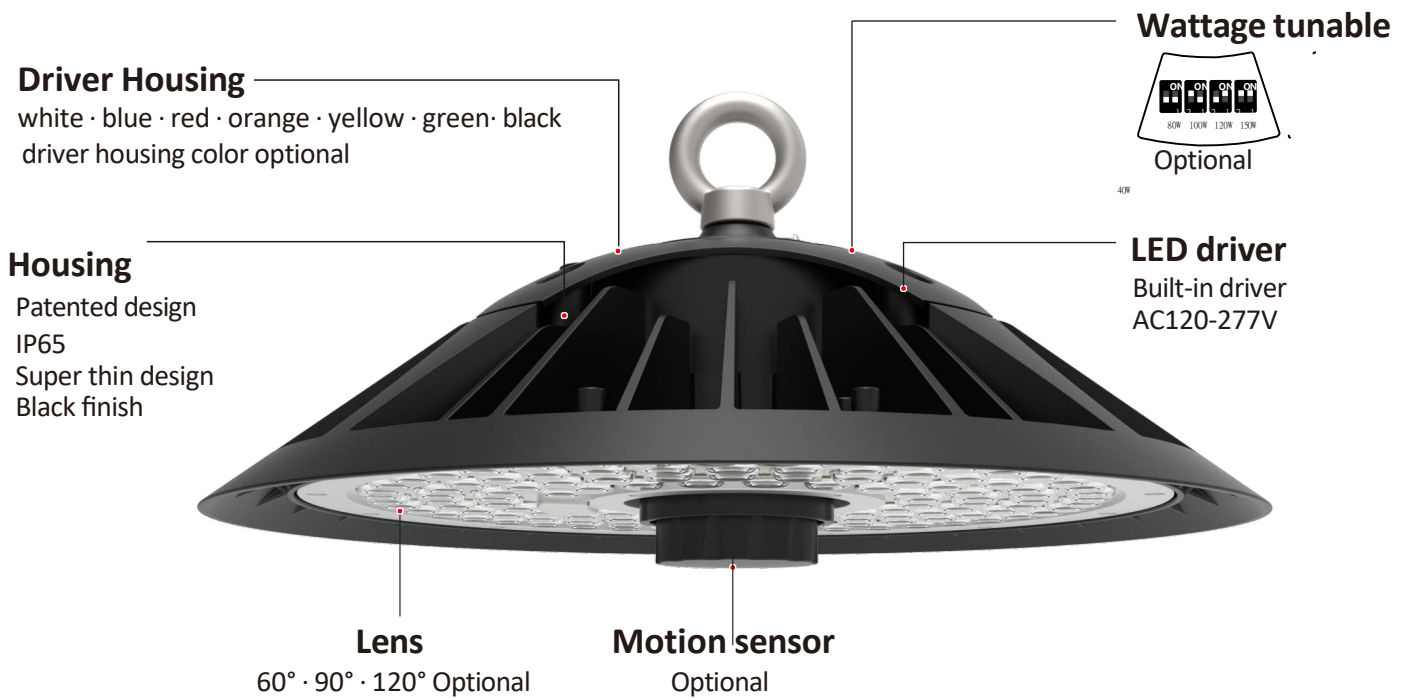


## Specifications

Model	Wattage	Input Voltage	CRI	CCT	Max Lumen Output @150LM/W	Beam Angle
UHBX80VW-5k	80/100/120/150W Selectable	AC120-277V	>80	5000K	22500	120
UHBX100W-5K	100W	AC120-277V	>80	5000K	15000	120


# Photometric Diagrams



60°



90°



120°

# Accessories



Motion sensor



Remote controller



O Hook Mount



G Hook Mount



U bracket



Emergency battery pack




PC reflector




Aluminum reflector

# Dimensions & Weight


## 80W/100W/120W/150W

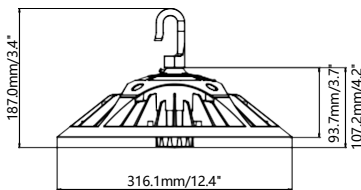

Net Weight: 2.95kgs/6.5Lbs

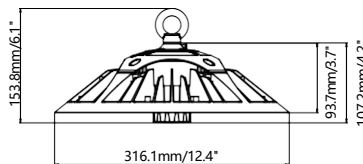

Net Weight: 2.95kgs/6.5Lbs

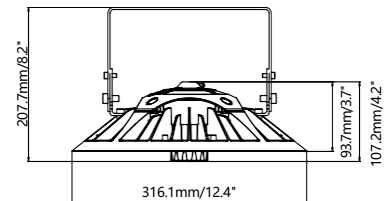

Net Weight: 3.55kgs/7.8Lbs