

VTN VAPOR TIGHT LIGHT

NSF Certified Food Safety Light with Selectable Wattage and CCT



- ◆ The VTN series vapor tight luminaire features a slim and modern design. It has best-in-class performance at up to 150lm/w output. They feature a smooth dust-proof surface with a watertight seal that can withstand high-pressure washdowns.
- ◆ It is also NSF certified for use in food processing and food safety environments. Applications include poultry processing, food & beverage processing, commercial kitchens, and manufacturing facilities.
- ◆ The VTN Series can be surface mounted to the ceiling or wall or suspended depending on the application. Motion sensor and emergency battery backups are optional.



Product Specifications



Construction:

- ◆ Rugged and durable construction with plastic housing

Electrical:

- ◆ 0-10V dimmable Driver, which can dim from 100% down to off.
- ◆ Input voltage AC120-277V for US market and 50/60Hz. 3 Foot power cord provided for easier installation.
- ◆ The power cord is tucked within the unit and can be pulled out when ready to install.

Optics:

- ◆ Selectable CCT 3500K, 4000K or 5000K (Default setting), CRI >80.
UV-stabilized, high impact, frosted polycarbonate lens for uniform light output and high impact resistance.

Finish:

- ◆ Housing is permanent pearl gray color.

Mounting:

- ◆ Comes standard with surface mounting kit. Pendant mounting is optional.

Ambient Temperature:

- ◆ -40°F (-40°C) to 113°F (45°C)

Compliances:

- ◆ NSF certified for food processing.
- ◆ cULus listed for wet locations.
- ◆ DLC® (DesignLights Consortium) Qualified.

Warranty :

- ◆ 5-years limited warranty.


Note:1.(165/135/105)W=165W, 135W, 105W Selectable, 165W default setting.
2.(35/40/50)K=3500K, 4000K, 5000K Selectable, 5000K default setting.
3.The Input Voltage AC120-277V is for US Market.

Performance Data

Lumen values are based on 120V AC input product configuration, contact for performance data on any configurations not shown here.

Model	Lumen Level	Wattage Selectable	Nominal CCT	CCT Selectable	Lumens	Watts	LPW	CRI
VTNXVW-VK	1	YES	3500K	YES	16900	105	161	>80
			4000K		18650	105	178	
			5000K		17250	105	165	
	2		3500K		20900	135	155	
			4000K		23100	135	171	
			5000K		21350	135	158	
	3		3500K		24750	165	150	
			4000K		27400	165	166	
			5000K		25350	165	154	

Power Selection And CCT Selection Capability

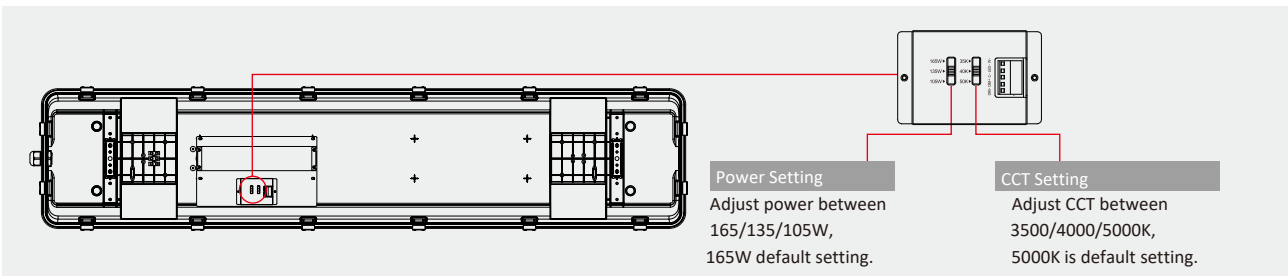

Note: Before Setting Power & CCT, release latches by pulling top of latch away from housing. Gently squeeze the buckle in and take out the PCB board (be careful not to touch the LEDs)

Accessories

Sensor

Field-Installable / Field-Use ONLY (purchased separately)

	Screw-in PIR Sensor		Screw-in PIR Sensor (Networking Wireless Control Version)
	Receptacle for Screw-in Sensor		Remote Control


Emergency Battery Backup

Factory-Installable OR Field-Installable (field-installable purchased separately)

	Emergency Battery Backup VTNX-15EMDRV / EMB15YY-260 -15W/90min, for BD-VTW, at AC120-277V
---	--

Mounts and Brackets

Field-Installable (purchased separately)

	Suspension Mounting Kit - 2pcs
---	--------------------------------

Electrical Data

Model Series	Wattage(W)	Current (A)				
		Input Voltage (V)				
		120	208	240	277	347
VTNXVW-VK	105	0.97	0.56	0.49	0.42	0.34
	135	1.25	0.72	0.63	0.54	0.43
	165	1.53	0.88	0.76	0.66	0.53

Dimensions

